

# FBA Series

Chip Ferrite Bead SMD Type  
Size 0805




## FEATURES


- E}• Œ μ Ÿ}v •}oμŸ}v (}Œ P v Œ o •}Pv o
- s Œ}}μ• (Œ <μ v Ç Z Œ š Œ}•Ÿ • Á}šZ î u
- ]+ Œ v š ( šμŒ • (}Œ }μv š Œu •μŒ • P
- šZ]vP (Œ}u P v Œ o •}Pv o • š} Z]PZr•%
- rŸîîî <μ o].
- K% Œ Ÿ}v P š u% Œ š pŒ Wî ñ ñ Œ š} = í ñ î Œ

## APPLICATION

Dimensions: [mm]

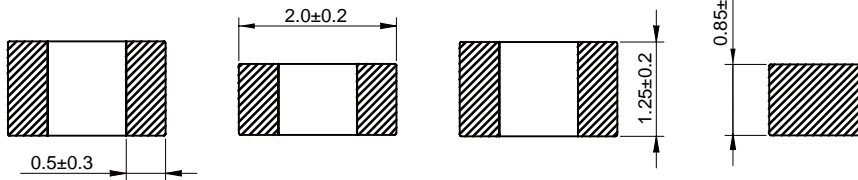



Land Pattern: [mm]



Electrical Properties:

	Impedance @ 100MHz ( )	DC Resistance Max. ( )	Temperature Rise Current Max. (mA)
& î ò ñ r í î r ò ì í Z	í í		
& î ò ñ r í ó ì r ò ì í Z	í ó		
& î ò ñ r í ò ì r ò ì í Z	í ò		
& î ò ñ r í î î r ò ì í Z	í î		
& î ò ñ r ò ì î r ò ì í Z	ò ì		
& î ò ñ r í í r ò ì í Z	í î î		
& î ò ñ r í ñ í r ò ì í Z	í ñ î		
& î ò ñ r í î r ó ñ í Z	í î î		
& î ò ñ r î î r ó í Z	î î î		
& î ò ñ r ð ó í r ó í Z	ð ó í		
& î ò ñ r ò ì r ñ í Z	ò ì î		
& î ò ñ r í î î r ò ì í Z	í î î î		
& î ò ñ r í î î r ñ í Z	í î î î		
& î ò ñ r í ñ í r ñ í Z	í ñ î î		
& î ò ñ r í î î r ñ í Z	í î î î		
& î ò ñ r î î î r ò ì í Z	í î î î		


## Typical Electrical Characteristics:

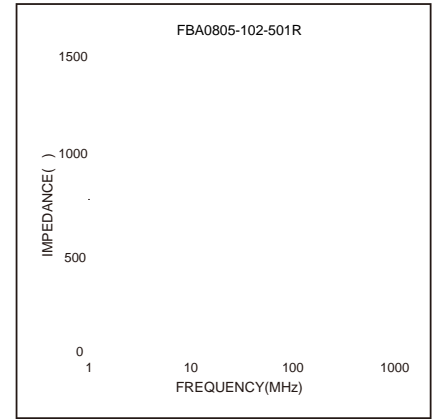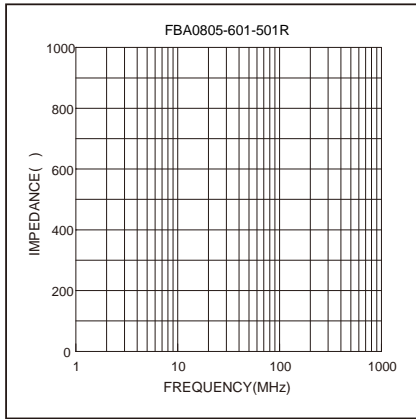

## Soldering Reflow:


## Packaging Information:

Tape Dimension:

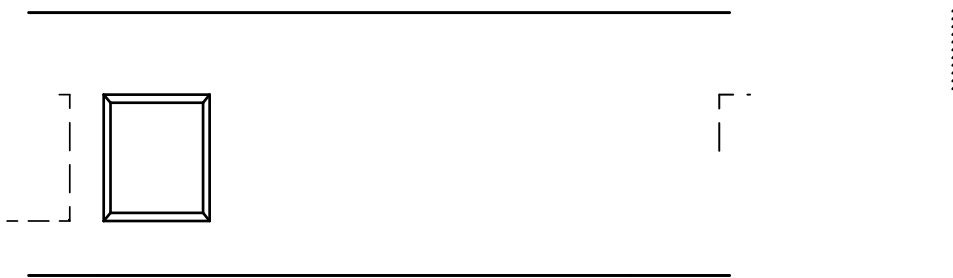

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
0805	1.30±0.05	2.10±0.05	1.5±0.1	4.0±0.1	4.0±0.1	8.0±0.3	0.95±0.05	1.75±0.1	0.95±0.05


Peel force of top cover tape:

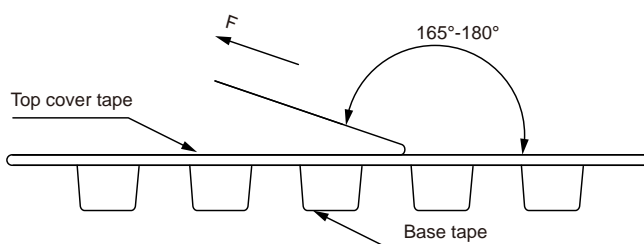

The peel force of top cover tape shall be between 0.14 to 0.58 N



## Reel Dimension: [mm]

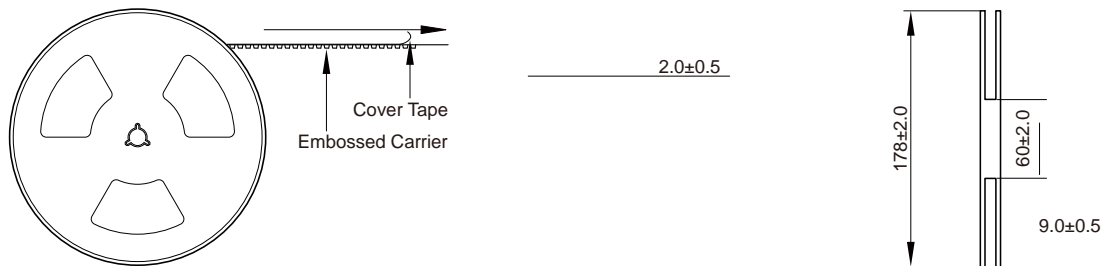

## Cautions and Warnings:

### Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature:  $-5$  to  $35^{\circ}\text{C}$ , humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

### Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed  $150^{\circ}\text{C}$ .
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does. As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.