MD Series

CHARACTERISTICS

- Molded type
- High satura on current due to CIP material
- Nature air gap and no acous c noise
- Di erent sizes available
- Opera ng temperature: -40 to +125 ℃
- Quan ty: 3000pcs

APPLICATION

-
- LC flter

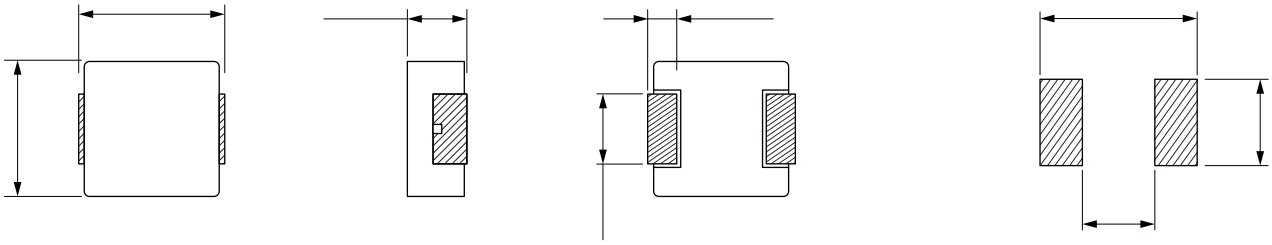

Part No	Inductance @ 100KHz/1V	Tolerance	Temperature Rise Current Typ.	Current Typ.	DC Resistance Typ.	DC Resistance Max.

Temperature rise current : The actual value of DC current when the temperature rise is ΔT40℃
Satura on Current will cause L to drop approximately 30%