

WIS Series




CHARACTERISTICS

- Small size and higher inductance available
- Small tolerance available
-

APPLICATION

- Filter
-

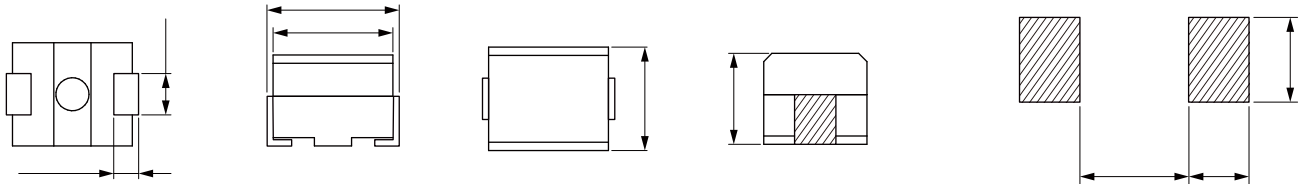

Part No	Inductance	Tolerance	Q Min.	Test Freq	SRF Typ.	DCR Max.	Temperature Rise Current Max.
				25.2			
				25.2			
				25.2			
				25.2			
				25.2	525		
				25.2			
				25.2			
				25.2			
				25.2	395		
				25.2			
				25.2			
				7.96	295		
				7.96	255		
				7.96			
				7.96			





Part No	Inductance	Tolerance	Q Min.	Test Freq	SRF Typ.	DCR Max.	Temperature Rise Current Max.
	2.2			7.96			
	2.7			7.96	65		
	3.3			7.96	55		
	3.9			7.96			
				7.96			
	5.6			7.96			
				7.96	35		
				7.96			
				2.52			
				2.52		2.5	
				2.52	25		
				2.52	22	3.3	
	22			2.52		3.7	
	27			2.52			
	33			2.52		5.6	
	39			2.52			65
				2.52			
	56			2.52			55
				2.52			
				2.52			
					9		
					7		65

°C

°C


°C

°C

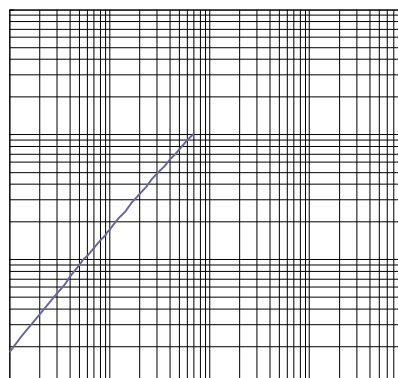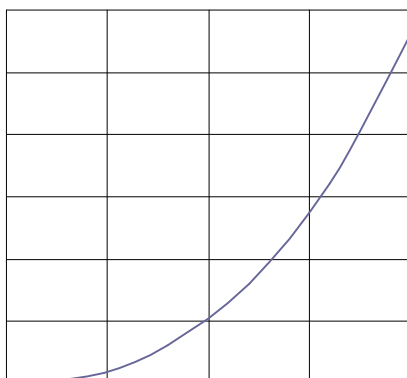



c

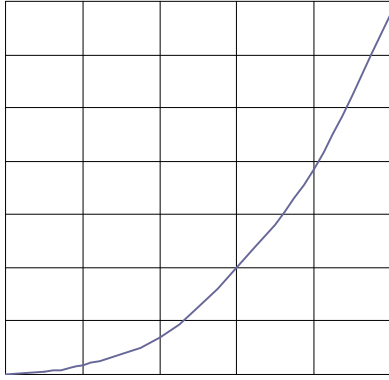

c

