

WWCI Series

SMD Wire Wound Ceramic Inductor
Size 1008

CHARACTERISTICS


- Wire wound with high Q and high SRF
- More stable due to ceramic design
- Small size and small tolerance available
- Quantity: 2000pcs

APPLICATION


- HF application

Dimensions: [mm]

Land Pattern: [mm]

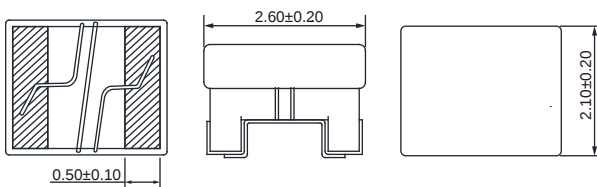

Electrical Properties:

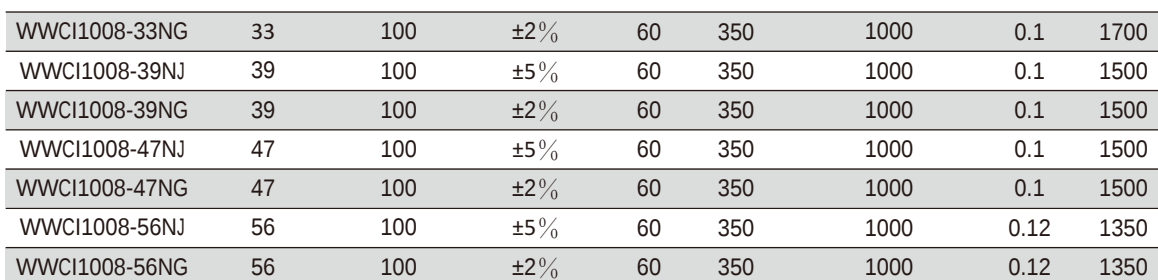


	0.15
	0.15
	0.18
	0.18
	0.18
	0.18
	0.2
	0.2
	0.22
	0.22
	0.33
	0.33
	0.45
	0.45
	0.75
	0.75
	0.9
	0.9
	1.06
	1.06
	1.17
	1.17
	1.5
	1.56
	1.5
	1.5
	1.5
	1.5
	1.5

Temperature rise current: the actual value of DC current when the temperature rise is $\Delta T15^{\circ}\text{C}$



Typical Electrical Characteristics:

Inductance VS. Frequency Characteristics:

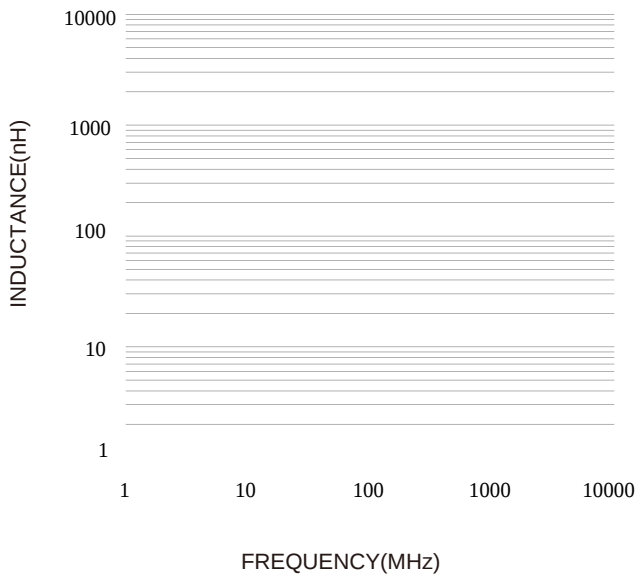

Temperture Rise VS. Frequency Characteristics:

